

UNDER COUNTER SOLID DOOR

REFRIGERATOR
MODEL : KUR24-4



FEATURES / BENEFITS

HOT GAS CONDENSATE SYSTEM

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

SIDE MOUNT COMPRESSOR UNIT

By positioning the compressor on the side of the unit, refrigerators can now be serviced without being moved. Our innovative, front breathing feature also allows this model to provide high efficiency in narrow spaces.

EFFICIENT REFRIGERATION SYSTEM

Turbo Air's solid door refrigerators are designed with oversized and balanced refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

EXTERIOR & INTERIOR OF THE CABINET

The Turbo Air K series boasts a stainless steel exterior (galvanized steel back and bottom). Interior is stainless steel floor with AL sides, back and AL door liners. It guarantees the utmost in cleanliness and long product life. It can add a touch of style to the most refined setting.

HIGH-DENSITY POLYURETHANE INSULATION

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

MAGNETIC DOOR GASKETS

Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.

ADJUSTABLE, HEAVY DUTY, PE (POLYETHYLENE) COATED WIRE SHELVES

ERGONOMICALLY DESIGNED DOORS

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

Model	Doors	Capacity (Liters)	Shelves	Compressor (HP)	Amps (A)	Weight (Kg)	L X D X H (mm)
KUR24-4	4	600	4	1/3	3.2	145	2400x700x855

UNDER COUNTER SOLID DOOR


REFRIGERATOR
MODEL : KUR24-4

Model : KUR24-4


SPEC SHEET	
Classification	Refrigerator
Cabinet Dimension (WxDxH mm)	2400x700x855
Capacity (Liters)	600
Inner Temperature	1°C~8°C
Doors	8
Number of Shelves	4
Refrigerant	R-134a
Compressor (Hp)	1/3
Lamp	LED lamp
Cooling Type	Fan cooling type
Insulation Type	Polyurethane / Cyclopentane + CFC Free
Temperature Control Type	Digital
Amps (A)	3.2
Voltage (V/Hz/Ph)	240V 50Hz 1Ph
Power (W)	440
Weight (Kg)	145

PLAN VIEW

(unit : mm)

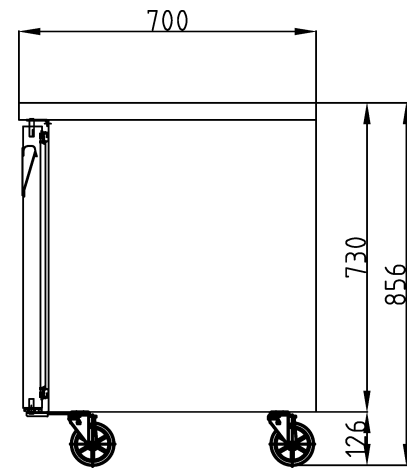

SIDE VIEW

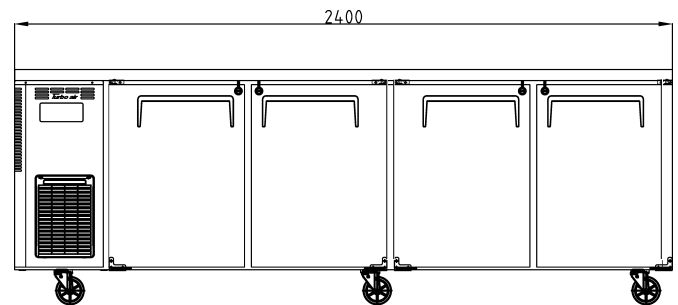

FRONT VIEW

- Door locking system standard
- Three color options available (standard): white cabinet (W), white cabinet with wine color trim (V) or black cabinet with black color trim (B)

OPTIONAL ACCESSORIES :

Additional PE coated wire shelf: P0178A0300

Price tag channel: P0122K5700 (18 $\frac{1}{2}$ "L)



WARRANTY **2 YEARS**
PARTS & LABOUR

AUSTRALIA BRANCH

Turbo air

TURBO AIR PTY LTD
www.turboairinc.com.au
Ground floor, Building E
10 Highgate St, Auburn
NSW 2144 Australia
T. 02 9737 9881